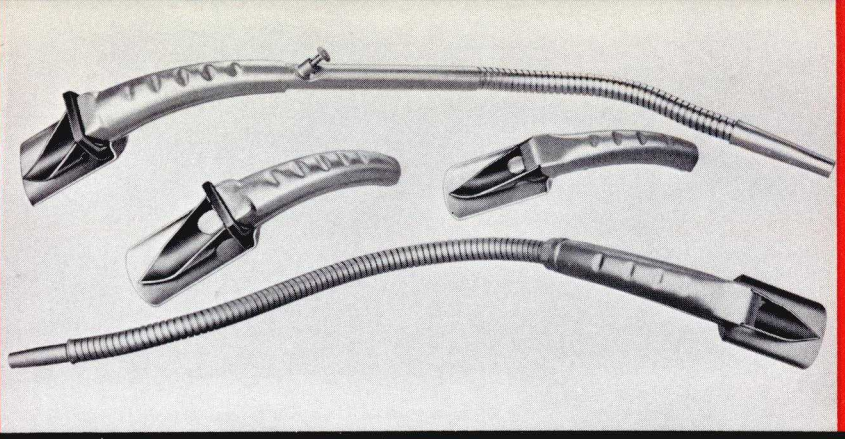

PLEWS oilers

first choice ... OF THE PROFESSIONAL MECHANIC

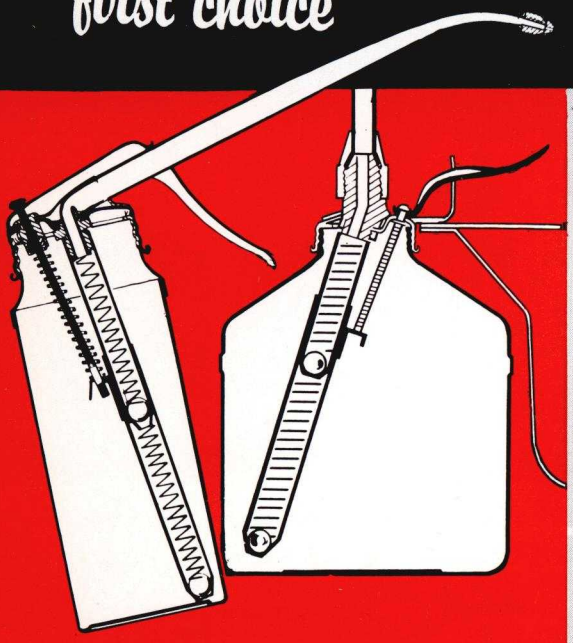

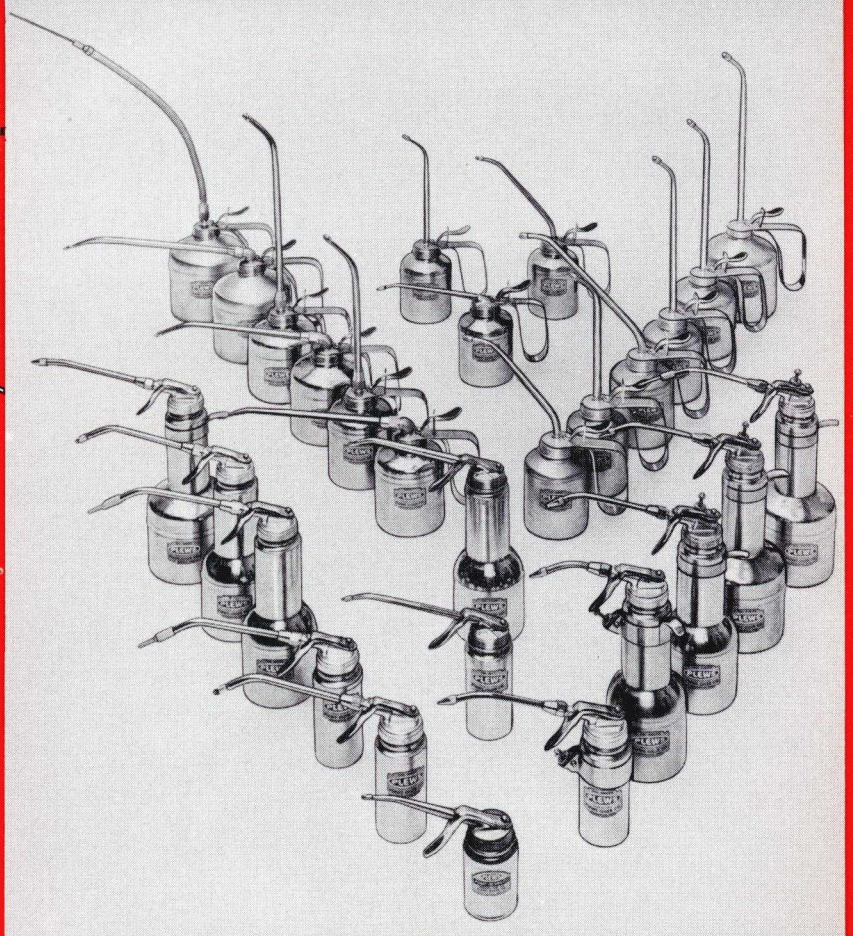

Only genuine Plews Oilers give you all these advantages:

Leakproof, drawn steel bodies — no bottom seams, no crimped or rolled bottoms!

Positive, powerful force-feed pumps. Steel ball valves, quality bronze valve springs.

Welded steel seamless rigid spouts!

MANUFACTURERS OF OVER 101 LUBRICANT DISPENSERS

PLEWS

Plews Oiler, Inc. 701 So. 7th St. • Minneapolis 15, Minn.

PLEWS...first choice OF THE PROFESSIONAL MECHANIC

MANUFACTURERS OF OVER 101 LUBRICANT DISPENSERS

PLEWS PRODUCTS

PLEWS PISTOL OILERS and HOLDERS

- Fixed Spout – Detachable Tip
- Leakproof drawn bodies
- Comfortable pistol grips
- Powerful, positive pumps, with bronze springs and steel ball valves

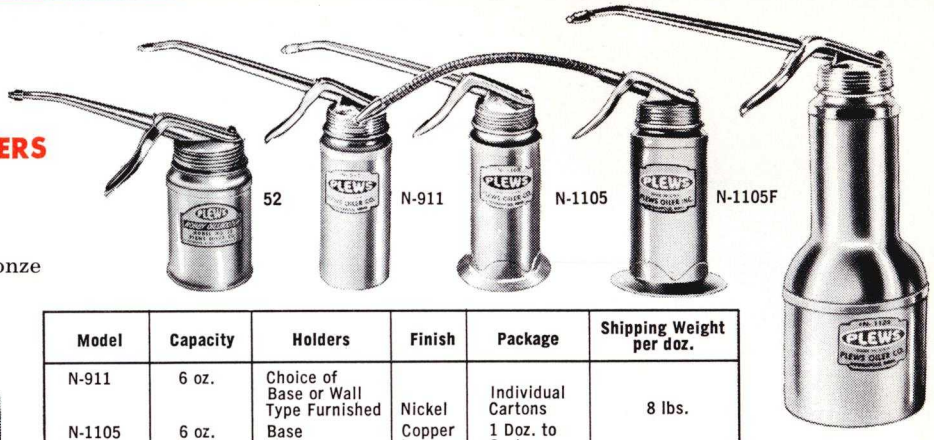



Base Only
Fits all 6 oz.
Pistol Oilers

Wall Holder
Fits all 6 oz.
Pistol Oilers

Model	Capacity	Holders	Finish	Package	Shipping Weight per doz.
N-911	6 oz.	Choice of Base or Wall Type Furnished	Nickel	Individual Cartons	8 lbs.
N-1105	6 oz.	Base	Copper	1 Doz. to Carton	
N-1105F	6 oz.	Base	Lacquer "		6 lbs.
N-1125	1 pint	None	Nickel	Individual Cartons	11 lbs.
52	4 oz.	None	Nickel	1 Dozen	4 lbs.

PLEWS PISTOL OILERS

• Leakproof tool box oiler • Detachable Spout – Detachable Tip • Detachable pump tubes • Closure caps on flexible spout models • Deep-drawn, steel bodies • Leakproof, welded steel spouts • Rugged pumps, with bronze springs and steel ball valves.

Models 965 DRS and 965 DFS are equipped with special "O" ring and closure tip for carrying in tool boxes. Absolutely leakproof! All spouts interchangeable. The new 965-12 Generator Oiler, complete with detachable flared base is especially designed for oiling generators and other hard-to-reach parts.

All individually boxed.

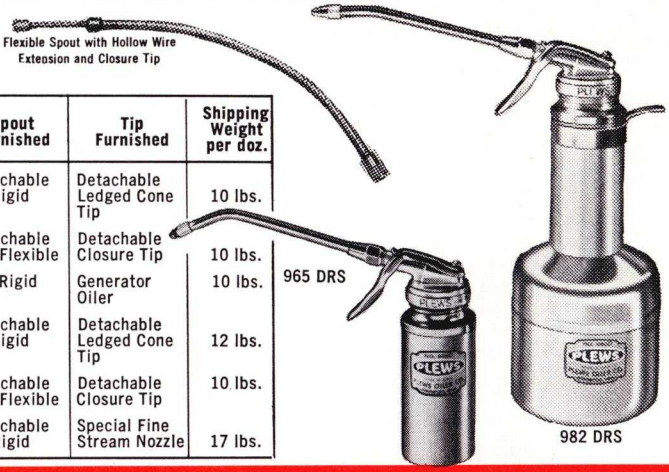

Model	Capacity	Spout Furnished	Tip Furnished	Shipping Weight per doz.
965 DRS	6 oz.	Detachable 5" Rigid	Detachable Ledged Cone Tip	10 lbs.
965 DFS	6 oz.	Detachable 13" Flexible	Detachable Closure Tip	10 lbs.
965-12	6 oz.	12" Rigid	Generator Oiler	10 lbs.
970 DRS	1 pint	Detachable 5" Rigid	Detachable Ledged Cone Tip	12 lbs.
970 DFS	1 pint	Detachable 13" Flexible	Detachable Closure Tip	10 lbs.
982 DRS	1 quart	Detachable 5" Rigid	Special Fine Stream Nozzle	17 lbs.

PLEWS SELECTO-LUBE SET

Know "where it is and what's in it" . . . eliminate time lost looking for the right lube, penetrant or solvent. The *COLOR KEYED* SELECTO-LUBE shows you at a glance what each oiler contains!

The SELECTO-LUBE SET consists of three quality proven Plews 6 oz. pistol oilers finished in RED, COPPER and GRAY, complete with triple wall holder. Labels on oilers are blank for filling in names. One dozen sets to a carton. Shipping weight per dozen units, 20 lbs.

PLEWS ADHESIVE GUNS & PUMP APPLICATORS

Easy-operating trigger action • Detachable, welded steel, 4" spout • Deep-drawn seamless steel body • Adhesive applicator nozzle • Special heavy-duty, force-feed pump, with bronze ball valves, and powerful return spring • Comfortable, natural-grip trigger • Dismantles for cleaning • Handles windshield sealer, weatherstrip adhesive, glass mastic, sealing cement, solvents, and many others. Base or wall holder available for No. 54.

Plews models 61 and 62 – for standard containers, 61 for the 8 oz., 62 with adapter for the pint. Model 61 is furnished with detachable 4" welded steel spout and detachable adhesive applicator nozzle, unless otherwise specified. Can be supplied with 4" knife blade tip. Model 62 is furnished with detachable 4" steel spout and adhesive applicator nozzle with wire closure. Special purpose tips or nozzles can be furnished at extra cost. Nickel plated.

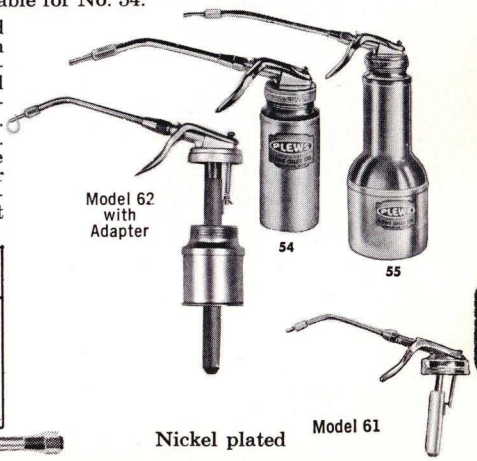

Model	Capacity	Package	Shipping Wt. Per Doz.
54	6 oz.	Indiv. Ctn.	10 lbs.
55	1 Pint	Indiv. Ctn.	12 lbs.
61	Fits Stand. 8 oz. Can	None	3½ lbs.
62	With Adapter Fits Stand. Pint Can	None	6½ lbs.

Brush tip, plastic spreader and needle point tip available for adhesive guns.



4" knife blade tip for No. 61 only.

PLEWS OILER, INC. 701 S. 7TH STREET • MINNEAPOLIS 15, MINN.

PLEWS CONTROLLED FEED OILERS (Series TX)

The "TX" MODEL OILER is designed for use in the textile, paper, printing, electronics and other industries, where uncontrolled oiling and dripping can damage the equipment, or the material being processed. These oilers dispense all grades and viscosities of oil.

Model	Capacity	Spouts*	Nozzle	Feed Control	Shipping Wt. per doz.
600 TX	6 oz.	2½", 4" or 7"	Steel Nozzle	One Drop Clamp Type	11 lbs.
600 TX-SM	6 oz.	Special 4" Tapered	None	One Drop Clamp Type	11 lbs.
625 TX	1 pint	2½" or 4"	Steel Nozzle	One Drop Clamp Type	14 lbs.
725 TX	1 pint	7 or 12"	Steel Nozzle	Overhead Full Stroke	14 lbs.
775 TX	1 quart	12 or 17"	Steel Nozzle	Overhead Full Stroke	17 lbs.
785 TX	1 quart	4" for Spindle Bolster Cups 24" for Cylinder Bearings	Bent Nozzle	Overhead Full Stroke	15 lbs. 18 lbs.

*See illustration for extra spouts and nozzles fitting TX models. Rigid spouts (thread ⅜-24) in the following lengths may be ordered for any model TX oiler: 2½, 4, 5, 7, 12, 17 and 24 inches. Steel nozzle (12-32 thread) or bent nozzle (12-32 thread) will fit any of these spouts.

• Pistol-type oilers • Pump stroke adjustment regulates flow of oil • Detachable steel nozzles • Detachable, welded steel spouts • Detachable pump tubes • Detachable strainers for easy cleaning • Leakproof, drawn steel bodies • Pumps have bronze springs and bronze ball valves.

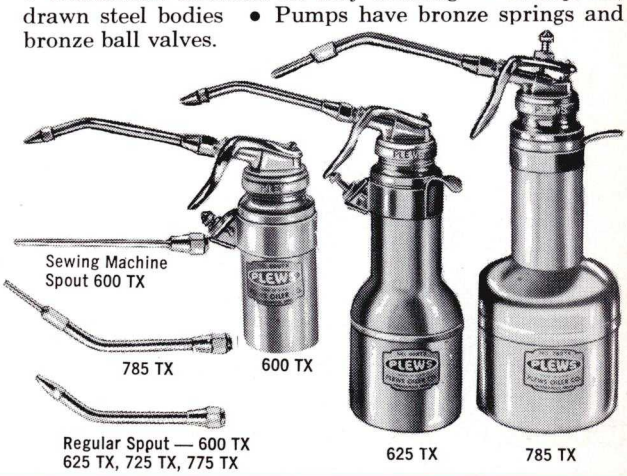

PLEWS PRODUCTS

PLEWS 800 SERIES HANDLED OILERS

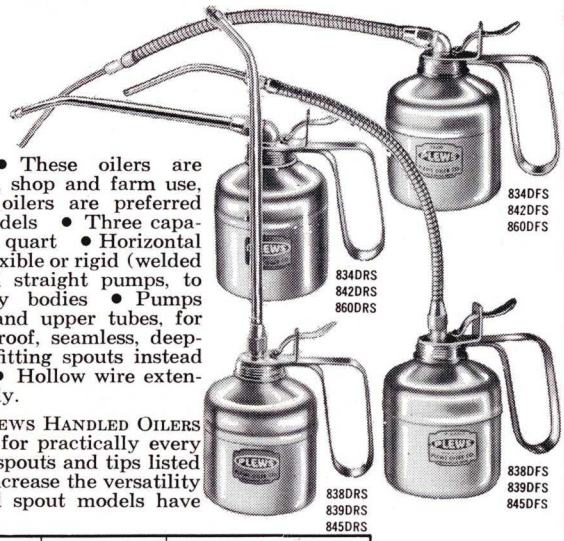

• Detachable spouts • These oilers are ideally suited to factory, shop and farm use, where the handle-type oilers are preferred • Your choice of six models • Three capacities – 1 pint, 1½ pint, 1 quart • Horizontal or vertical spouts • Flexible or rigid (welded steel spouts) • Angled straight pumps, to more completely empty bodies • Pumps have detachable lower and upper tubes, for easy cleaning • Leakproof, seamless, deep-drawn bodies • Flare-fitting spouts instead of compression fitting • Hollow wire extensions on DFS Models only.

This complete line of PLEWS HANDLED OILERS gives you the right unit for practically every lubricating job. Add the spouts and tips listed in chart below and you increase the versatility of these oilers. All rigid spout models have fixed tips.

Model	Capacity	Spout Furn.	Tip Furn.	Package	Wt. per doz.
834 DRS	1 pt.	Horizontal Rigid 9"	Fixed Ledged-Cone	4 to Ctn.	11 lbs.
834 DFS	1 pt.	Horizontal Flexible 15"	Detachable Hollow-Wire	4 to Ctn.	12 lbs.
838 DRS	1 pt.	Vertical Rigid 9"	Fixed Ledged-Cone	4 to Ctn.	11 lbs.
838 DFS	1 pt.	Vertical Flexible 15"	Detachable Hollow-Wire	4 to Ctn.	12 lbs.
839 DRS	1½ pt.	Vertical Rigid 9"	Fixed Ledged-Cone	3 to Ctn.	13 lbs.
839 DFS	1½ pt.	Vertical Flexible 15"	Detachable Hollow-Wire	3 to Ctn.	14 lbs.
842 DRS	1½ pt.	Horizontal Rigid 9"	Fixed Ledged-Cone	3 to Ctn.	13 lbs.
842 DFS	1½ pt.	Horizontal Flexible 18"	Detachable Hollow-Wire	3 to Ctn.	14 lbs.
845 DRS	1 qt.	Vertical Rigid 11"	Fixed Ledged-Cone	3 to Ctn.	18 lbs.
845 DFS	1 qt.	Vertical Flexible 18"	Detachable Hollow-Wire	3 to Ctn.	19 lbs.
860 DRS	1 qt.	Horizontal Rigid 11"	Fixed Ledged-Cone	3 to Ctn.	18 lbs.
860 DFS	1 qt.	Horizontal Flexible 18"	Detachable Hollow-Wire	3 to Ctn.	19 lbs.

Detachable Rigid Spouts fitting ½-20 thread bases
9" Rigid with fixed ledged-cone tip
11" Rigid with fixed ledged-cone tip
16" Rigid without ledged-cone-tip
26" Rigid without ledged-cone tip
13" Rigid with 180° arched spout end
60" Rigid with 180° arched spout end

Detachable Flexible Spouts fitting ½-20 thread bases
15" overall, Flexible, with detachable Flexible Hollow Wire Extension (12-32) threads
18" overall, Flexible, with detachable Flexible Hollow Wire Extension (12-32) threads

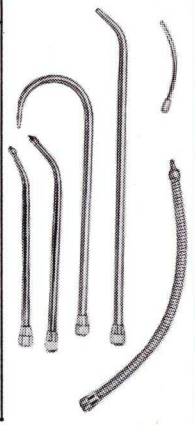

EXTRA SPOUTS FOR "800" SERIES
Needle tips and brush tips available for all 12-32 thread spouts.

PLEWS HANDLED OILERS

• Nickel Plated • Fixed Spouts – Thumb Lever Action • Plews Handled Oilers with fixed spouts are specially designed for general factory, shop and farm use • Deep-drawn steel bodies • Powerful pumps, with bronze springs and steel ball valves • Ledged tips.

Model	Capacity	Fixed Spout	Finish	Package	Shipping Wt. per doz.
N-10	⅞ pint	Upright Rigid 7"	Nickel	6 to Carton	11 lbs.
N-20	⅞ pint	50° Angle Rigid 7"	Nickel	6 to Carton	11 lbs.
N-25	⅞ pint	15° Angle Rigid 7"	Nickel	6 to Carton	11 lbs.
3335	1 pint	Vertical 9"	Lacquered	None	10 lbs.
3340	1 pint	Angle 9"	Lacquered	None	10 lbs.

Form 500 — 29

PLEWS PRODUCTS

QUALITY STEEL BENCH OILERS

• Heavy-gauge, welded steel spouts • Knurled brass spout bushing, with machine-cut threads • Drawn seamless steel body • Bottom of special quality steel electrically welded to body. All spouts are interchangeable on all bodies • Genuine leather washers • Steel neck bushings, with machine-cut threads • Guaranteed leakproof

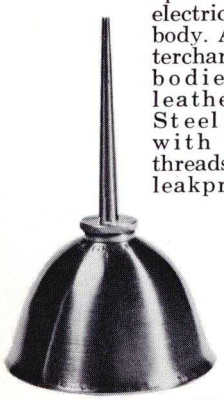

RIGID SPOUT OILERS

Gem No.	Plews No.	Trade Capacity	Size & Type Spout	Weight Per Doz.
1604	490-4	⅛ pint	4″ Straight	3¾ lbs.
1606	490-6	⅛ pint	6″ Bent	3⅞ lbs.
1609	490-9	⅛ pint	9″ Bent	4¼ lbs.
1612	490-12	⅛ pint	12″ Bent	4⅝ lbs.
1704	491-4	½ pint	4″ Straight	4½ lbs.
1706	491-6	½ pint	6″ Bent	4⅝ lbs.
1709	491-9	½ pint	9″ Bent	4⅞ lbs.
1712	491-12	½ pint	12″ Bent	5⅜ lbs.
1804	492-4	¾ pint	4″ Straight	5½ lbs.
1806	492-6	¾ pint	6″ Bent	5⅞ lbs.
1809	492-9	¾ pint	9″ Bent	6 lbs.
1812	492-12	¾ pint	12″ Bent	6¼ lbs.
1904	493-4	1 pint	4″ Straight	6¼ lbs.
1906	493-6	1 pint	6″ Bent	6⅝ lbs.
1909	493-9	1 pint	9″ Bent	6⅝ lbs.
1912	493-12	1 pint	12″ Bent	7¼ lbs.

Packed One Dozen of a Size to a Carton

SPARK PROOF OILER

This all brass unit is safe to use in the presence of inflammable materials where a steel can could represent a dangerous hazard due to the possibility of striking a spark.

Model	Trade Cap	Spout Length	Weight Per Doz.	Std. Pkg.
494-9	1 Pint	9 inches	7¼	12

FLEXIBLE SPOUT OILERS

These flexible spout oilers use the same bodies as above and give long and satisfactory service. Flexible steel tubing, ¼″ inside diameter, is used and seam is packed with asbestos lining. Base of spout is made from solid brass with machine cut threads.

Gem No.	Plews No.	Trade Capacity	Spout Length	Weight Per Doz.
1607-F	490-7½F	⅛ pint	7½″	4¼ lbs.
1707-F	491-7½F	½ pint	7½″	4¾ lbs.
1807-F	492-7½F	¾ pint	7½″	5¾ lbs.
1907-F	493-7½F	1 pint	7½″	6¾ lbs.

Packed One Dozen to a Carton

EXTRA SPOUTS

Customarily furnished as shown. Specify "S" for straight spout or "B" for bent spout if other style is desired.

Gem No.	Plews No.	Length	Type	Wt. Doz.
215-S	504-S	4″	Straight	15 oz.
216-B	506-B	6″	Bent	1 lb., 2 oz.
217-B	509-B	9″	Bent	1 lb., 6 oz.
218-B	512-B	12″	Bent	1 lb., 13 oz.
425-F	507½-F	7½″	Flexible	1 lb., 5 oz.

THE ROYAL ECONOMY LINE

Extra profits come to you quickly and easily, when your customers see the eye-catching line of Royal Oilers. Durable, lacquered bodies and gleaming, nickel-plated spouts give these oilers a look of quality that your customers instantly recognize and appreciate. Priced to sell competitively, the Royal Line of quality oilers assures you of faster sales . . . greater profits.

R-1F Flexible Spout

R-1 Rigid Spout

Standard equipment on the farm. Lacquered body, nickel-plated cap and 4″ rigid spout. 10 oz. capacity. Wt. per Doz. 4 lbs.

No. 8 Harvester Oiler

One-piece, drawn steel body, with double-seamed, leak-proof bottom, positive pump. Rigid spouts have special ledged tips . . . originated by PLEWS . . . which make spring-held covers of oil-cups easy to open. Weight per Doz. 4¾ lbs.



R-2 Rigid Spout

MODEL NUMBERS R2, R3 AND R3F

Rigid and Flexible spouts. Powerful pump is designed to last a lifetime. The R3 is available in both rigid and flexible spouts, the R2 in angled rigid spout only. All handled models are 10 oz. capacity. Weight per doz. 7½ lbs.

Rigid Spout 5½″ length
Flexible Spout 8″ length

R-3F Flexible Spout

R-3 Rigid Spout

PLASTIC PISTOL OILER



This plastic hydraulic pump oiler is a real profit builder for housewares departments and hardware stores. A choice of bright red, yellow or green finishes and a low competitive price pack plenty of sales appeal for the ladies especially

Finger-tip plunger; holds up to four ounces of lubricating oil; removable base permits easy filling without spilling; gives fine pressurized stream that lubricates hard-to-get-at parts; seamless construction of durable, translucent tenite plastic; lightweight, fits snugly in the hand. Use with lubricating oil or water only.

	Standard Package	Weight Per Dozen
AP-101	12 to reship carton	1¾ lbs.

PLASTIC GREASE GUN

Functional, trouble-free, all-purpose, as modern as push button control. Develops up to 3,000 lbs. pressure per square inch. The 3 inch straight nozzle makes easy work of those hard-to-reach grease fittings. The ideal lubricator for maintaining powered lawn mowers, workshop tools, automobiles, outboard motors, tractors, chain saws, etc. The amber translucent body with a yellow base is a real eye catcher. Made of tough tenite, stands by itself. Fits hands comfortably. Packed 6 to a reship carton including display.

	Standard Package	Weight Per Dozen
AP202	6	4¼ lbs.

PLEWS

OIL SPOUTS and TRANSMISSION FILLERS

(Nickel Plated)

The Plews oil spouts are made of high-quality steel and have the sharpest, hardest and longest-wearing cutting blades on the market. The N-5P has a new leak-proof patented neoprene gasket – makes a perfect seal on both one quart and five quart cans. Guaranteed leak-proof. The 5PJ does not have the neoprene gasket, but also fits up to five quart cans. The 10PCS is very handy for 4-ounce to one quart cans and has a nickel-plated spout cap.

AUTOMATIC TRANSMISSION FILLERS

(Push Button Control)

No more broken valve handles—25" spout, the longest spout on the market, makes filling transmissions easier and faster.

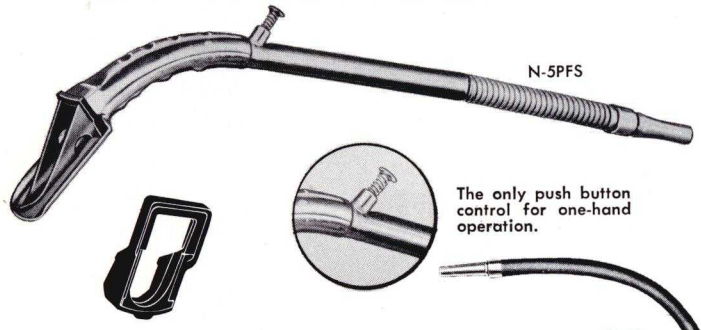

The only push button control for one-hand operation.

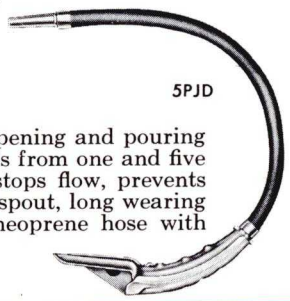

The 5PJD is designed for opening and pouring automatic transmission fluids from one and five quart cans. Pinching hose stops flow, prevents spilling. Nickel-plated steel spout, long wearing blade and 16" high-grade neoprene hose with steel nozzle.

PLEWS

FUNNEL TYPE TRANSMISSION FILLER

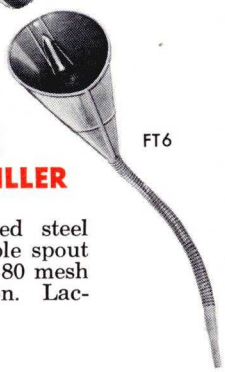

Equipped with a tempered steel cutting blade, an 18" flexible spout with a tapered tip, and an 80 mesh screen for dirt protection. Lacquered finish.

MODEL	SIZE	STD. PKG.	WT. PER. DOZ.
N-5P	8½"	12	7 lbs.
5PJ	7½"	12	6 lbs.
10PCS	4"	12	1 lb.
5PJD	23" overall	6	11 lbs.
N-5PFS	25" overall	1	9 lbs.
FT6	18" Spout	6	21 lbs.

ROYAL

OIL SPOUTS (The Economy Line)

Lacquer Finish — For cans up to and including five quarts

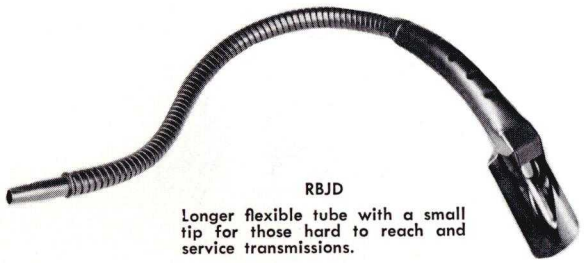

Longer flexible tube with a small tip for those hard to reach and service transmissions.

This economical spout, in Plews' familiar copper finish is rugged and durable, and designed to allow for complete drainage of the oil can. Made of quality steel and has a sharp and durable blade.

Backed by Plews' famous guarantee and 30 years of experience in manufacturing quality products for dispensing oil, this new economy oil spout is "tops" – yet competitively priced.

MODEL	SIZE	STD. PKG.	WT. PER DOZ.
RB1	7½"	12	6 lbs.
RB2	8½"	12	7 lbs.
RBJD	23" overall	6	11 lbs.

PLEWS...first choice OF THE PROFESSIONAL MECHANIC

MANUFACTURERS OF OVER 101 LUBRICANT DISPENSERS

PLEWS PRODUCTS

PLEWS POSITIVE-GRIP BATTERY CARRIER

INSTRUCTIONS
Instant adjustment for all batteries. For use with long narrow batteries raise latch to form seat for set screw.

Here's the battery carrier that meets modern needs . . . the carrier that "fits to a T" the new 12-volt batteries with off-center terminal posts. 85% of the new batteries have off-center terminal posts.
Sturdily built of case-hardened steel, the new PLEWS "positive-grip" battery-carrier "by-passes" the terminals of modern batteries . . . safely and surely grips the case itself . . . makes strap-type carriers obsolete. Just turn this carrier's adjustment screw . . . claw-like clamps grip the case like a vise. No chance of dropping and damaging expensive batteries! No risk of spilling battery-acid and burning body and clothing! No strain on the battery's posts – no danger of the posts breaking!

BC14 **Std. Pkg. 6** **Wt. per Doz. 20 lbs.**

PLEWS BARREL PUMP

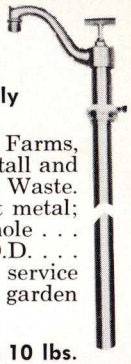

For lubricants, alcohol, kerosene, linseed oil, etc. Delivers approximately one quart of fluid per stroke.

The Ideal Pump for Industrial Plants, Farms, Garages, Filling Stations, etc. Easy to Install and Operate . . . Saves Time . . . Eliminates Waste. Fits 15 to 55 gallon drum . . . heavy cast metal; adapter threaded to fit 1½" to 2" bung hole . . . 18 gauge heavy duty cylinder . . . 1½" O.D. . . . metallic piston valve for long carefree service . . . cast aluminum spout threaded to fit garden hose coupling.

BP16 **Std. Pkg. 2** **Wt. per Pkg. 10 lbs.**

PLEWS GAS CAP HOLDER

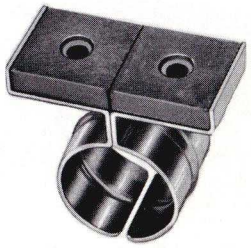

The NEW "CAP CADDY" consists of two heavy duty magnets in a plated rust-proof clamp which fits all gas hose. The strong magnets grip positively—eliminates lost gas caps—saves cost of replacements – saves money. The Plews "Cap Caddy" is a must for every filling station.

	Std. Pkg.	Wgt. per Doz.
GT15	12	2½ lbs.

PLEWS GEAR CASE FILLER for outboard motors

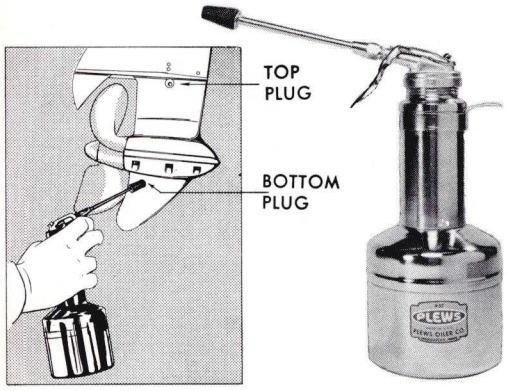

The Plews Gear Case Filler makes a clean, quick job of filling the gear case of any outboard motor. You just remove the top and bottom oil plugs, butt the Plews filler spout against the face of the lower fill hole, and pump the hypoid into the gear case to the level of the upper vent hole. Then, holding the spout in place, you tightly secure the upper plug. With this done, the oil in the case is air bound so spout is removed and lower plug with its gasket tightly installed. As simple as A, B, C!

57 **Std. Pkg. 1** **Wt. per Doz. 15 lbs.**

PLEWS BRAKE FLUID DISPENSER

• Special, 22-inch flexible, plastic tubing spout • 90-degree-angle tip • Quart-size body, with seamless, drawn steel bottom • Heavy-duty, brass pump-assembly, with steel ball valve and bronze valve springs • Positive, forced-feed pump-action. The PLEWS Forced-Feed Brake Fluid Dispenser saves time, material and money on all brake and hydraulic system service jobs.

Capacity one quart

	Standard Package	Wt. per Doz.
59	3 to Carton	20 lbs.

PLEWS HEAVY DUTY SUCTION GUN

1¼ pint capacity . . . vinyl plastic flexible hose makes it easy to use in those hard-to-reach places. Will handle all oils, gas, fuel oil, kerosene and other non-corrosive fluids. Standard package of six with each gun individually packaged.

	Standard Package	Wt. per Doz.
PSG18	6 Individual Cartons	33 lbs.

643P 10" spout
645P 4" spout

PLEWS BLOGUNS & SPRAY CLEANERS

Clean engines, radiators, tire-casings and gears . . . do a dozen different jobs in seconds. Snaps onto Schrader, Dill and most other chucks. Use the blogun and spray cleaner to paint equipment, tanks, bulk surfaces, simply attach the Fan Spray Nozzle (807FS) to the Plews blogun, and you have a painter or sprayer. The 809P (with a 6-foot hose) can be used with drums for cleaning or spraying larger areas.

		STD. PKG.	WT. PER DOZ.
643P	Pistol Type 10" spout	12	7½ lbs.
645P	Pocket Type 4" Spout	12	6 lbs.
805P	Sprayer Cleaner	12	20 lbs.
809P	With 6' hose	12	13 lbs.
807FS	Spray Tip Nozzle, also available		

No More Burnt Hands!

Mechanics have asked for this New

PLEWS

Generator Oiler
No. 965DRS-12

New PLEWS 6 oz. Pistol Oiler . . . 12" Rigid Spout with a detachable cone tip and flared base, made especially for oiling generators and other hard to reach places on new cars and machinery.

Dealers and Mechanics Net Each

$2.16

FIRST CHOICE OF PROFESSIONAL MECHANICS

PLEWS OILER, INC. 701 South 7th Street · Minneapolis 15, Minnesota

L-10 (69.5)

AUTOMOTIVE RESALE

TERMS: F.O.B. Minneapolis. Full freight allowed, 150 pounds and over. Broken package charge 50c. 50c minimum billing.

FORCE-FEED PISTOL TYPE PUMP OILERS

Model No.	Dealers & Mechanics Net Each
N-911-W (With Wall Holder)	$1.79
N-911-B (With Base Holder)	1.79
N-1105	1.46
N-1105F	1.86
N-1125	2.60
965D-5	2.03
965D-13 (flex)	2.52
965D-12	2.16
970D-5	2.81
970D-13 (flex)	3.30
982D-5	4.23



SELECTO-LUBE

1107	4.50

HOBBY OILSHOOTER

52	1.13

ADHESIVE GUNS AND PUMP APPLICATORS

54 Adhesive Gun	2.25
55 Adhesive Gun	3.00
61-R, Applicator	1.43
61-K, Applicator	1.43
62, Applicator	2.52

SPECIAL TX PISTOL MODELS

600TX-2½	3.26
600TX-4	3.31
600TX-7	3.38
600TX-4-SM	3.19
625TX-2½	3.89
625TX-4	3.94
625TX-7	4.01
625TX-12	4.09
725TX-2½	3.71
725TX-4	3.76
725TX-7	3.83
725TX-12	3.91
775TX-2½	4.34
775TX-4	4.39
775TX-7	4.46
775TX-12	4.54
775TX-17	4.61
775TX-24	4.69
785TX-2½	4.83
785TX-4	4.88
785TX-7	4.95
785TX-12	5.03
785TX-17	5.10
785TX-24	5.18

All spouts on TX Models are interchangeable.

STANDARD HANDLED MODELS

Model No.	Dealers & Mechanics Net Each
N-10	$1.64
N-20	1.73
N-25	1.73
N-3335	1.80
N-3340	1.80

N-3375—Discontinued, order No. 839D-9.
N-3385—Discontinued, order No. 845D-11

HANDLED MODELS

With Detachable Spouts

834D-9	2.13
834D-15 (flex	2.73
838D-9	2.13
838D-15 (flex)	2.73
839D-9	2.33
839D-13 (arch)	2.52
839D-16	2.52
839D-26	2.60
839D-15 (flex)	2.90
842D-9	2.33
842D-16	2.52
842D-26	2.60
842D-18 (flex)	2.93
845D-11	2.69
845D-13 (arch)	2.81
845D-16	2.81
845D-26	2.89
845D-60 (arch)	4.09
845D-18 (flex)	3.22
860D-11	2.69
860D-16	2.81
860D-26	2.89
860D-18 (flex)	3.22

All spouts interchangeable on the "800" series.

ROYAL ECONOMY OILERS
Handled and Pistol Models

Royal No. R-1	1.20
Royal No. R-1F	1.50
Royal No. R-2	1.35
Royal No. R-2F Discontinued	1.65
Royal No. R-3	1.35
Royal No. R-3F	1.65
Royal No. 8	.42

PLASTIC PISTOL OILER

AP-101	.74

PLASTIC GREASE GUN
"A Handy Little Greaser"

AP-202	2.02

PLEWS OILER, INC.

701 Seventh Street South **MINNEAPOLIS 15, MINN., U.S.A.**

Form 811 2-59 PRINTED IN U.S.A.

Plews Oil Spouts and Automatic Transmission Filler

Model No.	Dealers & Mechanics Net Each
N-5P (replaces 5P)	$1.65
5PJ	1.35
10PCS	.54
5PJD	3.26
N-5PFS (replaces 5PFS)	4.50
FT-6	6.00

ROYAL OIL SPOUTS AND AUTOMATIC TRANSMISSION FILLER ECONOMY LINE

RB1	1.05
RB2	1.20
RBJD	3.00

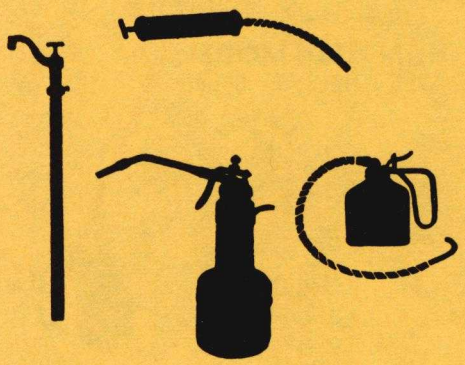

SUCTION GUN

PSG-18	3.45

BARREL PUMP

BP-16	6.00

BRAKE FLUID DISPENSER

59	3.57

GEAR CASE FILLER

57	4.65

BATTERY CARRIER

BC-14	3.48

GAS CAP HOLDER - "CAP CADDY"

GT-15	1.01

BLOGUNS AND SPRAY CLEANERS

643P	Pistol Type, 10" spout	1.25
645P	Pocket Type, 4" spout	1.10
805P	Sprayer, Cleaner	4.38
809P	with 6' hose	4.38

SPOUT & PUMP ASSEMBLIES

(Without holder, without body)
For Pistol & Handled Models with Fixed Spouts

Part No.	Description	Dealers & Mechanics Net Each
12- 1	for N-911	$1.40
12- 2	for N-1105	1.22
12- 3	for N-1105F	1.62
12- 4	for N-1125	1.64
12- 5	for 52	.83
12- 6	for N-10	1.31
12- 7	for N-20	1.38
12- 8	for N-25	1.38
12- 9	for N-3335	1.46
12-10	for N-3340	1.46

PUMP ASSEMBLIES

(Without spout, without body)
For Pistol & Handled Models with Detachable Spouts

Part No.	Description	Dealers & Mechanics Net Each
12-11	for 965D	$1.59
12-12	for 970D	1.79
12-13	for 982D	2.88
12-14	for 600TX	2.57
12-15	for 625TX	2.73
12-16	for 725TX	2.82
12-17	for 775TX	3.33
12-18	for 785TX	3.54
12-19	for 54	1.70
12-20	for 55	1.85
12-21	for 59	1.73
12-22	for 834D-838D	1.40
12-23	for 839D-842D	1.55
12-24	for 845D-860D	1.79

Plews Accessories, Replacement and Repair Parts

DETACHABLE SPOUTS FOR FORCE-FEED PUMP OILERS

Part No.	For Models Nos.	Type Spout	Length	Dealers & Mechanics Net Each
13- 1	965D and 970D	Rigid	5"	$ .35
13- 2	982D	Rigid	5"	.38
13- 3	965D, 970D, 982D	Flexible	13"	.84
13- 4	54, 55, 62 (with Adhesive Nozzle)	Rigid	4"	.50
13- 5	61 only with Adhesive Nozzle	Rigid	4"	.42
13- 6	61 only with Knife Blade Tip	Rigid	4"	.42
13- 7	600TX-SM	Rigid	4"	.23
13- 8	600TX, 625TX, 725TX, 775TX	Rigid	2½"	.30
13- 9	600TX, 625TX, 725TX, 775TX	Rigid	4"	.35
13-10	600TX, 625TX, 725TX, 775TX	Rigid	7"	.42
13-11	600TX, 625TX, 725TX, 775TX	Rigid	12"	.50
13-12	600TX, 625TX, 725TX, 775TX	Rigid	17"	.57
13-13	600TX, 625TX, 725TX, 775TX	Rigid	24"	.65
13-14	785TX with Bent Nozzle	Rigid	2½"	.42
13-15	785TX with Bent Nozzle	Rigid	4"	.47
13-16	785TX with Bent Nozzle	Rigid	7"	.54
13-17	785TX with Bent Nozzle	Rigid	12"	.62
13-18	785TX with Bent Nozzle	Rigid	17"	.69
13-19	785TX with Bent Nozzle	Rigid	24"	.77
13-20	834D, 838D	Rigid	9"	.35
13-21	839D, 842D	Rigid	9"	.38
13-22	845D, 860D	Rigid	11"	.45
13-23	839D, 845D (Arched)	Rigid	13"	.57
13-24	839D, 842D, 845D, 860D	Rigid	16"	.57
13-25	839D, 842D, 845D, 860D	Rigid	26"	.65
13-26	845D (Arched)	Rigid	60"	1.85
13-27	834D, 838D, 839D	Flexible	15"	.95
13-28	842D, 845D, 860D	Flexible	18"	.98
13-29	59	Plastic	22"	.95

HOLDERS AND BRACKETS

WH-6	Wall Type Holders for 6 oz. Pistol Models	.15
BH-6	Base Type Holders for 6 oz. Pistol Models	.15
BH-7	Bracket for No. 1107 Selecto-Lube	.60

ACCESSORY FOR SPRAYER, CLEANER

FSN-1	Fan Spray Nozzle 807FS	.57

WELDED STEEL BENCH OILERS

RIGID SPOUT OILERS

Plews Model No.	Gem Model No.	Capacity	Spout Furnished	Dealers & Mechanics Net Each
490-4	1604	1/3 pint	4" Rigid Straight	$ .80
490-6	1606	1/3 pint	6" Rigid Bent	.83
490-9	1609	1/3 pint	9" Rigid Bent	.86
490-12	1612	1/3 pint	12" Rigid Bent	.89
491-4	1704	1/2 pint	4" Rigid Straight	.89
491-6	1706	1/2 pint	6" Rigid Bent	.92
491-9	1709	1/2 pint	9" Rigid Bent	.95
491-12	1712	1/2 pint	12" Rigid Bent	.98
492-4	1804	3/4 pint	4" Rigid Straight	.98
492-6	1806	3/4 pint	6" Rigid Bent	1.01
492-9	1809	3/4 pint	9" Rigid Bent	1.04
492-12	1812	3/4 pint	12" Rigid Bent	1.07
493-4	1904	1 pint	4" Rigid Straight	1.07
493-6	1906	1 pint	6" Rigid Bent	1.10
493-9	1909	1 pint	9" Rigid Bent	1.13
493-12	1912	1 pint	12" Rigid Bent	1.16

FLEXIBLE SPOUT OILERS

490-7½F	1607F	1/3 pint	7½" Flexible	1.02
491-7½F	1707F	1/2 pint	7½" Flexible	1.11
492-7½F	1807F	3/4 pint	7½" Flexible	1.20
493-7½F	1907F	1 pint	7½" Flexible	1.29

ALL BRASS SPARK-PROOF OILER

494-9		1 pint	9" Rigid Bent	1.73

SPOUTS FOR WELDED STEEL BENCH OILERS
(All Spouts Interchangeable)

Plews Model No.	Gem Model No.	Length	Type	Dealers & Mechanics Net Each
504S	215S	4"	Rigid Straight	.41
506B	216B	6"	Rigid Bent	.44
509B	217B	9"	Rigid Bent	.47
512B	218B	12"	Rigid Bent	.50
504B	215B	4"	Rigid Bent	.41
506S	216S	6"	Rigid Straight	.44
509S	217S	9"	Rigid Straight	.47
507½F	425F	7½"	Flexible	.63

BODIES FOR WELDED STEEL BENCH OILERS

Plews Model No.	Gem Model No.	Capacity	Dealers & Mechanics Net Each
490	1600	1/3 pint	.39
491	1700	1/2 pint	.48
492	1800	3/4 pint	.57
493	1900	1 pint	.66